



Easy-action  
Door Closer

# DORMA TS 83



## The multi-function, multi-purpose door closer

### Outstanding versatility.

### Quality assured.

### Tested to EN 1154.

Decades of experience have gone into the development of the DORMA TS 83. The result is user comfort coupled with outstanding versatility. It can be adjusted to suit almost all types of door. Additional anti-corrosion protection for exposed or aggressive conditions is available to special order.

Fixing couldn't be easier and last but not least – it's engineered for excellence.

Certified to ISO 9001.

### Plus points ...

#### ... for the trade

- Streamlined product range means low inventory costs and reduced stocking requirement.
- Comprehensive choice of accessories provides practical and effective solutions to meet special applications.

#### ... for the specifier/architect

- Compact closer design and sturdy flat-form arm assembly.
- Wide range of standard functions supplemented by optional extras.
- Suitable for fire doors. (CERTIFIRE approved ITT Ref. CF 118)

#### ... for the installer

- Easy to fix.
- Can be "tailored" to the requirements of the door by simple adjustment.
- Just one model for RH (ISO 5) and LH (ISO 6) doors and for standard and frame/lintel fixing and parallel arm.
- Spring strength range EN 2-6 to suit virtually every application.



#### ... for the user

- Optimum wall and door protection thanks to "thinking" backcheck.
- Closing speed virtually unaffected by temperature fluctuations.
- High mechanical efficiency gives easy-action opening.

### Applications and fixing ...



#### ... on the pull side

Door leaf fixing (standard installation)

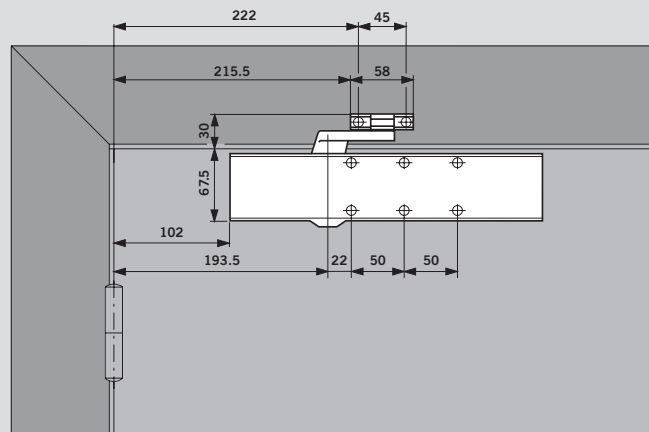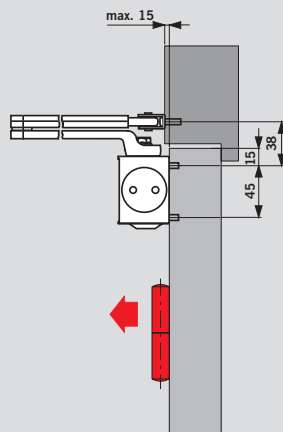



#### ... on the push side

Door leaf fixing (parallel arm installation) With parallel arm application, the backcheck comes in later at between 85° and 90°, depending on the door thickness and projection of the hinge used; the delayed action, on the other hand, releases the door at an earlier point in its closing sweep.

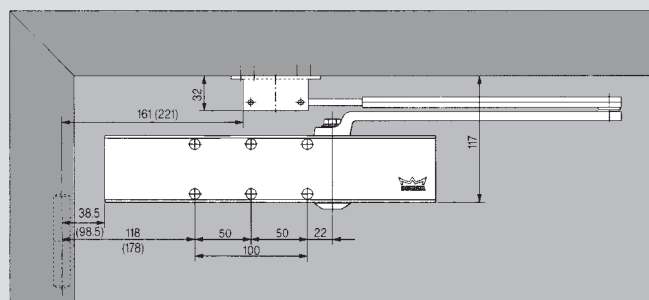

#### Examples

Installation for the opposite hand is a mirror image of the above illustrations.

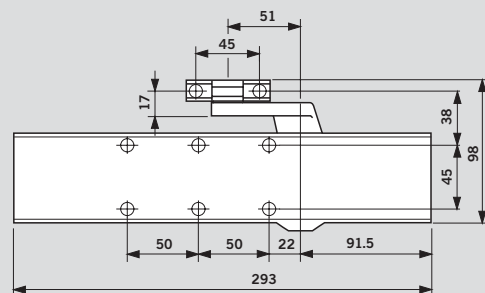


 The TS 83 conforms to most recognised international standards and complies with the requirements and/or recommendations of the following: CERTIFIRE approved for fire doors ITT; Ref. CF 118 Closer weight: 3.3 kg

**Standard functions**

**With “thinking” backcheck –** Thanks to an innovative design concept, the resistance developed by this backcheck system is directly proportional to door acceleration as the door is opened beyond approx. 70°. It is almost imperceptible when the door is opened slowly. However, if the door is opened roughly, the backcheck responds in equal measure.

And if the door should be flung open at speed – whether deliberately, thoughtlessly, accidentally or as a result of a gust of wind – the backcheck reacts at full strength, protecting the wall and door from damage.



**If no backcheck function is required, the system can simply be switched off.**



- 1 Self-adjusting backcheck
- 2 Fully controlled closing with adjustable speed
- 3 Adjustable latch range

**And with delayed action –** The integrated delayed action enables the closing cycle to be retarded within an adjustable range so that


disabled persons, mothers with prams and people carrying bulky items are able to pass through the door without difficulty.



- 1 Adjustable delayed action
- 2 Fully controlled closing with adjustable speed


**With optional hold-open arm –** Combining the TS 83 with a hold-open arm enables the door to be held open at an appropriate angle (up to

approx. 150°). The hold-open function of the standard hold-open arm can be switched on and off by the user by simply pressing a pushbutton.




- 1 Hold-open range


**Hold-open arms are not approved for fire doors.**




**Standard installation**  
Art. No. 8300




**Frame installation**  
Art. No. 8300




**Parallel arm installation**  
Art. No. 8300  
(The above bracket is supplied with every TS 83 standard door closer.)




**Hold-open arm installation**  
Art. No. 8301  
Adjustable for hold-open up to 150°. Can be switched off to act as a standard arm.




**Soffit bracket and arm for standard installation with shaped architrave**  
Art. No. 8382/1



**Parallel arm bracket with upstand**  
(\*upstand 35 or 60 mm)  
Art. No. 8382/2



**Angle bracket installation**  
Frame installation for outward opening doors with extra deep reveals.  
Art. No. 8357



**Drop plate installation**  
For installation on frame (or door) when direct fixing of closer is not possible.  
Art. No. 8359

### Specification text

DORMA TS 83 rack and pinion door closer; non-handed; hydraulic control from 180°; adjustable spring strength EN 2-6; separate sweep and latch valve; self-adjusting backcheck and

adjustable delayed action. Suitable for standard or frame installation on doors up to 1400 mm wide. Parallel arm installation suitable for doors up to 1200 mm wide.

Specify finish: silver, dark bronze, gold lacquer. A range of colours is also available.

For architectural electro-plated finishes see separate brochure.

### Door Control Division worldwide [www.dorma.com](http://www.dorma.com)

**Central Europe**  
DORMA GmbH + Co. KG  
Breckerfelder Str. 42-48  
D-58256 Ennepetal  
Tel. +49 23 33/7 93-0  
Fax +49 23 33/7 93-495

**Australia**  
DORMA Door Controls Pty. Ltd.  
52 Abbott Road  
Hallam/Victoria 3803  
Australia  
Tel. +61 3/97 96 35 55  
Fax +61 3/97 96 39 55

**China**  
DORMA Door Controls (Suzhou)  
Co. Ltd.  
No. 9, Hong Feng Road  
Suzhou Singapore Industrial Park  
Suzhou, 215021  
P. R. of China  
Tel. +86 512/67612481  
Fax +86 512/67614582  
DORMA Door Controls Pte. Ltd.  
Room 701, Technology Plaza  
651 King's Road  
North Point  
Hong Kong  
Tel. +825/250 34632  
Fax +825/288 75370

**Emerging Markets**  
DORMA GmbH + Co. KG  
Breckerfelder Str. 42-48  
D-58256 Ennepetal  
Tel. +49 23 33/7 93-0  
Fax +49 23 33/7 93-495

DORMA Door Controls (Pty.) Ltd.  
Kings Court,  
4A Mineral Crescent  
ZA-2000 Crown/Gauteng  
South Africa  
Tel. +27 11/8 30 02 80  
Fax +27 11/8 30 02 91

**Far East**  
DORMA Far East Pte. Ltd.  
No. 31 Gul Lane  
Singapore 629425  
Tel. +65 62 68/76 33  
Fax +65 62 65/79 14

**France**  
DORMA France S.A.S.  
Europarc  
42, rue Eugène Dupuis  
F-94046 Créteil  
Tel. +33 1/41 94 24 00  
Fax +33 1/41 94 24 01

**Gulf**  
DORMA Gulf Door Controls FZE  
Jebel Ali Free Zone,  
Roundabout 8,  
Unit VC 02  
Dubai, United Arab Emirates  
Tel. +971 48/83 90 14  
Fax +971 48/83 90 15

**North America**  
DORMA Architectural Hardware  
DORMA Drive, Drawer AC  
Reamstown, PA 17567  
Tel. +1-800-523-8483  
Fax +1-800-274-9724

**Scanbalt**  
DORMA Danmark A/S  
Sindalvej 6 - 8  
DK-2610 Rødovre  
Tel. +45 44/54 30 00  
Fax +45 44/54 30 01

**South America**  
DORMA Sistemas de Controles  
para Portas Ltda.  
Av. Piracema, 1400  
Centro Empresarial Tambore  
CEP 06400 Barueri/  
São Paulo, Brasil  
Tel. +55 11/41 91 32 44  
Fax +55 11/41 91 21 93

**South-East Europe**  
DORMA AUSTRIA GmbH  
Pebering Strass 22  
A-5301 Eugendorf  
Tel. +43 62 25/2 84 88  
Fax +43 62 25/2 84 91

**South Europe**  
DORMA Italiana S.r.l.  
Via. A. Canova 44/46  
I-20035 Lissone (MI)  
Tel. +39 039/24 40 31  
Fax +39 039/24 40 33 10

DORMA Ibérica, S.A.  
Camino San Martín de la Vega, 4  
E-28500 Arganda del Rey  
(Madrid)  
Tel. +34 91/8 75 78 50  
Fax +34 91/8 75 78 81

**UK/Ireland**  
DORMA UK Ltd.  
Door Controls Division  
Wilbury Way  
GB-Hitchin  
Hertfordshire SG4 0AB  
Tel. +44 14 62/47 76 00  
Fax +44 14 62/47 76 01

